


SpatialStream™ Server to Server Authentication using GetSIK

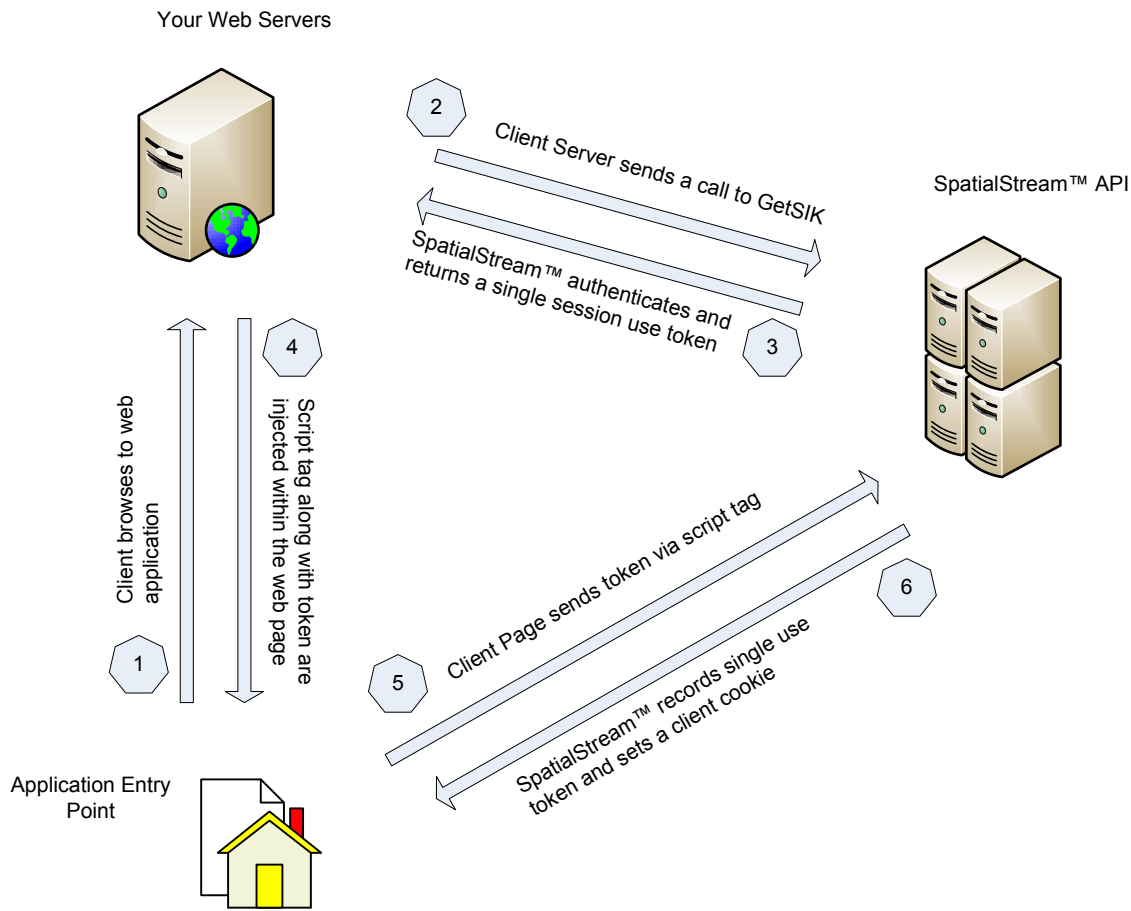

- 1 User accesses your web application and initiates the start of a session
- 2 A call to GetSIK is passed from the client application server to the SpatialStream™ API
- 3 The SpatialStream™ API checks to see that the call is from an allowable IP address or range. If the authentication pass a single use token us sent back to the client application.
- 4 The client application then injects a script tag that includes the token that is executed as the client page is loaded on the Users browser
- 5 When the client page is loaded the InitSession call within the script tag is sent to the SpatialStream™ API along with the token and authenticates the user for the remainder of the session
- 6 The InitSession call will then set a cookie on the client that is then used in subsequent requests